

530,468
10/530468

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/039712 A1

(51) International Patent Classification⁷: **B65H 37/00**

[JP/JP]; 5-8, Magarimatus 2-chome, Hadano, Kanagawa 259-31 (JP).

(21) International Application Number:
PCT/US2003/030951

(74) Agents: **KNECHT, Harold, C., III**, et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(22) International Filing Date: 1 October 2003 (01.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-312741 28 October 2002 (28.10.2002) JP

(71) Applicant (for all designated States except US): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, **AM**, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventor; and

(75) Inventor/Applicant (for US only): **FUJIWARA, Daisuke**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **TAPE APPLICATION JIG FOR PRESSURE SENSITIVE ADHESIVE TAPE**

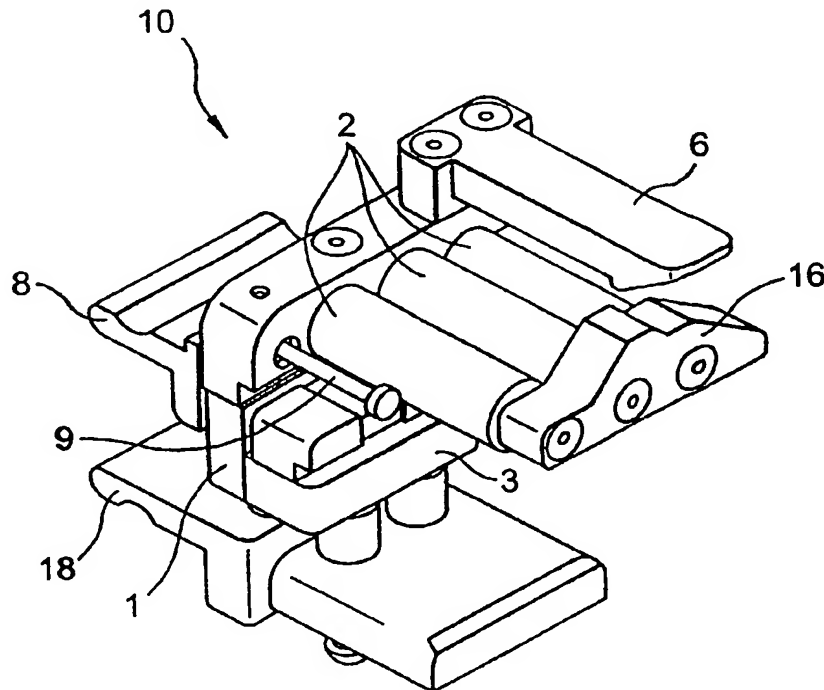

(57) Abstract: A tape application jig (10) comprising a tape application head (2), a jig guide (3) and a tape holding member consisting of a pair of members (6, 16) combined so as to face each other in vertical direction. The jig guide (3) comprises a guide pin (13) capable of abutting during the movement of the jig guide against the surface of the adherent opposite to the tape applying surface portion.

WO 2004/039712 A1